#### PreBoot Authentication Password Cracking on a budget



H2HC conference, Sao Paulo, Brasil Jonathan Brossard, Nov 2009 endrazine@gmail.com

#### « A desobediência é uma virtude necessária à criatividade »

#### - Raul Seixas

@ TemplatesWise.co

#### Before we start...

- Thanks to the organizers, sponsors and volonteers for making this happen in Brasil :)
- Thank you for coming.
- I'm very happy to be here !



#### Introduction



**Keyboard internals** 

Brute forcer design

**Experimental results** 

Conclusion & bonus !

#### Goals, contributions :

- Demonstrate the feasability of brute force attacks on preboot authentication passwords.
- Give a pessimist estimation of the cost of password cracking on full encryption software using a generic instrumentation methodology.
- Use this metric to adapt password length policy acording with the value of the protected assets.

#### Juridical environment

- Cryptographic software is mostly legalized in both North and South America and Europe.
- Wikipedia : « In China, a license is still required to use cryptography. Many countries have tight restrictions on the use of cryptography. Among the more restrictive are laws in Belarus, Kazakhstan, Mongolia, Pakistan, Russia, Singapore, Tunisia, and Vietnam. »
- Users of cryptographic software must give either a copy of their keys or plain text equivalent of any text asked by authorities in case of trial, or face prison sentences in most

Crypto software poor reviews + Governments interrests + global business communications + terrorism blah blah

### Is such a thing credible?

- Quoting <u>Wikipedia</u> :
- « **DES** was designed to be resistant to differential cryptanalysis, a powerful and general cryptanalytic technique known to NSA and IBM, that became publicly known only when it was rediscovered in the late 1980s. According to Steven Levy, IBM rediscovered differential cryptanalysis, but kept the technique secret at NSA's request. The technique became publicly known only when Biham and Shamir re-rediscovered and announced it some years later. The entire affair illustrates the difficulty of determining what resources and knowledge an attacker might actually have. »

#### **Technical motivations**


- Even serious developpers don't test their crypto software enough, if at all (Debian SSL bug : ~32k keys).
- Vendors (in particular Truecypt) have adopted policies where they do not cover certain attacks (eg: Plain text password leakage as we presented at Defcon 0x16, or Joanna Rutowska's avilmaid attack) loaving the

#### More globally

- Non tech people will say :
  « if it fails just go for bruteforce ».
- Sure.. but how do you do it ?
  I couldn't find a public tool myself. And then I started to wonder...

#### Keyboard internals

#### II-1) Boot sequence overview

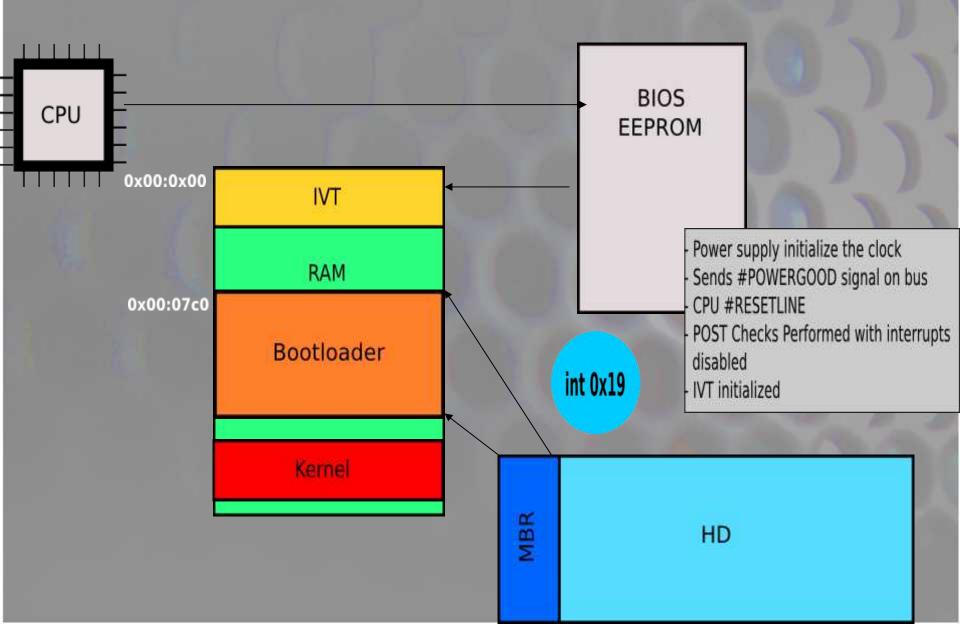

## II-2) BIOS API for user inputs (1/2)

Interruption 0x16 invoked via functions

 ah=0x00, "Get keystroke": returns the keystroke scancode in AH and its ASCII code in AL.


 ah=0x01, "Check for keystroke": idem, but the Zero Flag is set if no keystroke is available in the Bios

# II-2) BIOS API for user inputs (2/2)

eg : lilo password reading routine :


236	drkbd: m	ov ah,#1	; is a key pressed ?
237	int	0x16	
238	jz	comcom	; no -> done
239	xor	ah,ah	; get the key
240	int	0x16	
241	loop	drkbd	

### II-3) BIOS internals for keyboard management

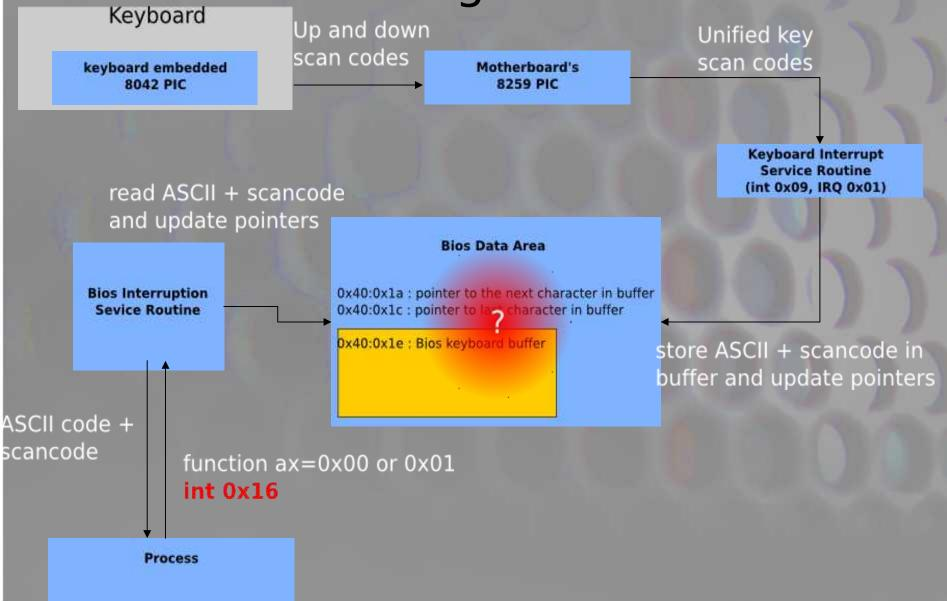


#### II-4) BIOS keyboard buffer Remanance... (1/3)

 Filling the BIOS keyboard buffer (with the keyboard) :

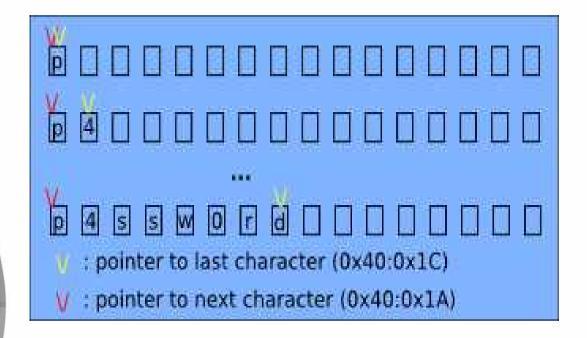

## II-4) BIOS keyboard buffer Remanence...

 Reading the BIOS keyboard buffer (using int 0x16, ah=0x00 or 0x01) :

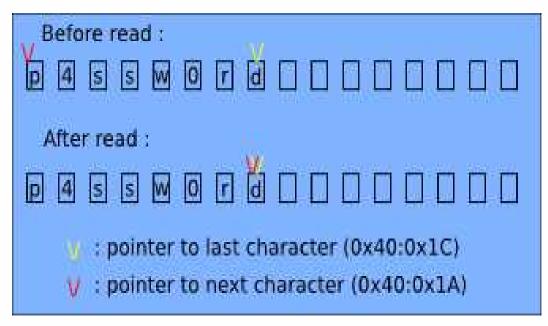

#### Demo Simulating keystrokes by PIC programming (from real mode)


Demo Simulating keystrokes by PIC programming (from protected mode under x86 GNU/Linux)

(aka: brute force any GUI)

#### Exemple of application :

Rebooting a computer protected with a password (assuming you know that password - for now ;), by simulating keystrokes at boot time...

#### Attack scenario :

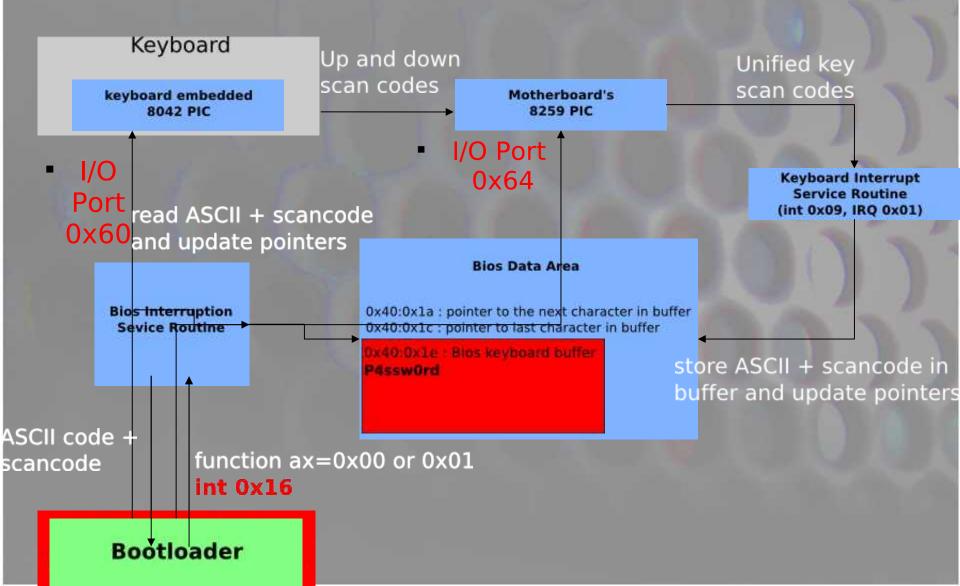

#### Notes :

 You can get the code for this attack from the Defcon archive (the attack is called « Invisible Man »).

 For our cracking purpose, writing directly to 0x41e is way more efficient (but that was cool, right ? ;) Demo Retreiving passwords from physical memory from userland without privileges (up to Vista SP0)

#### Notes

- Bitlocker's fix in Vista SP1 (replacing any character by ' ') still leaks the password length.
- This plain text password leakage vulneability is still present on many software including Lilo and Grub if you can read from arbitrary physical memory locations (typically needs root privileges).

#### Brute forcer design

#### Challenges

- Installation & initial control flow modification (BIOS Firmware, other media, MBR replacing/patching)
- Maintaining control (BP, IVT hijack, runtime patching)

#### Design decisions

- We want something as generic as possible, so we will avoid application specific breakpoints etc.
- The media we boot from is irrelevant (usb/cdrom/floopy..)
- Keeping control over the control flow is a bit tricky.
- Very similar to MBR virus writting (old school !! ;)

#### Interrupts hijacking

- Int 0x13 : we need to proxy calls to the original int 0x13, changing disk number (dl). It also allows to detect successfull decryption
- Int 0x16 : simulate keystrokes
- Int 0x10 : for performance (we don't need display)

#### Full attack scenario

- Boot from our code (1 sector)
- Allocate BIOS memory
- Copy the rest of our code there
- Patch the IVT (int 0x16, int 0x10, 0x13)
- Emulate int 0x19 (copy code from original MBR to 0x00:0x7c00, jump there)


#### jonathan@blackbox:~/h2hc\$ cat BF-OS.asm |grep -v "^;"| grep [a-Z0-9]|wc -l 902 jonathan@blackbox:~/h2hc\$

#### **Demo** Bruteforcing Lilo

#### **Demo** Bruteforcing Grub with **MD5** hash

#### Demo Bruteforcing full disk encryption with TrueCrypt 6.3

### Experimental results

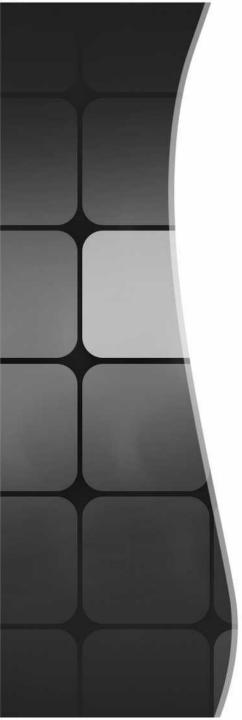

#### Result #1

#### It's doable :)



#### The cost of hashing algorithms (MD5..) is negligible in the cracking process

#### Result #3 : performance

## Hashing algorithms : we tried 705 passwords in 30s.

#### Truecrypt : 10s / password (whow !)

#### Metrics (assuming a hashing algo is used)

#### Time taken to crack

#### Irrelevant (cloud computing !)

#### Search space

#### S = sigma (i=1,length) sizeof(charset)^i



## $C = O (S * 3/70 * cpu_freq/(1.6GHz) * cost_per_hour)$

#### Amazon EC2

United States	Europe		
Standard On-Demand Instances		Linux/UNIX Usage	Windows Usage
Small (Default)		\$0.085 per hour	\$0.12 per hour
Large		\$0.34 per hour	\$0.48 per hour
Extra Large		\$0.68 per hour	\$0.96 per hour
High-Memory On-Demand Instances		Linux/UNIX Usage	Windows Usage
Double Extra Large		\$1.20 per hour	\$1.44 per hour
Quadruple Extra Large		\$2.40 per hour	\$2.88 per hour
High-CPU On-Demand Instances		Linux/UNIX Usage	Windows Usage
Medium		\$0.17 per hour	\$0.29 per hour
Extra Large		\$0.68 per hour	\$1.16 per hour



#### C ~ 3/70 \* 0.085 \* sigma (i=1,length) (sizeof(charset)^length)



#### Exemple : charset = [a-z] Pass length = 5

Cost ~ \$45 000



#### Exemple : charset = [a-z] Pass length = 8

#### Cost ~ \$800 000 000



#### Exemple : charset = [a-zA-Z0-9] Pass length = 8

#### Cost ~ \$800 000 000 000

#### Conclusions (1/2)

 Bruteforcing is physically doable for both hashing algorithms and complex symetric systems.

- Bruteforcing remains unpractical against Truecrypt <u>so far</u> (6 passwords / minute, recommended pass phrases of length 20).

- This methodology, while generic, is too costly to be practical against strong passwords (unless you're .gov ?).



 Not using TPM like technologies allows attackers to take advantage of distributed computing, making the brute force time irrelevant.

#### Bonus Random ideas dump that could not fit anywhere else in the presentation...

#### Having Alan Cox code your i386 real mode backdoor

(if you can't afford a trainee...)

Faxineira.asm Joanna Rutowska's Evilmaid attack made generic

(trojan & sniff any software's password)

## Faxineira.asm EvilMaid made generic

- Allocate BIOS memory.
- Copy yourself (1 sector) there, jump there.
- Hijack int 0x10 : save any pressed key to a 16 bytes buffer, then jump to old handler.
  - Copy old MBR at 0x00:0x7c00
  - Jump to 0x00:0x7c00

#### Bootkit/Rootkit : MBR ? floppy ? usb drive ? Cdrom ?

# Network connections from bootloaders

(without coding your own network stack)

## Other possible attacks

- Timing attacks (count ticks using rdtsc)
- Glitching (won't work :-( )
- Getting physical : FPGA (for hashing algos only : nsa@home project)

### A few more things on TrueCrypt 6.3

# Truecrypt's policy and assumed attack surface

- No TPM support. Won't happen.
- No support against root or physical attacks (bootkits, trojaning ...)
- Regarding full disk encryption (the real thing why TC is great) : no keyfiles support as of version 6.3.

#### No TPM means

- No hardware sealing.
- We can modify the bootloader.
- We can scale on hardware/virtualisation.

## Key/pass repudiation

- Setting a new key/passphrase pair is not enough : one needs to fully decrypt the drive, and then fully re encrypt it.
  - Old key/pass pair would still be valid otherwise.

### Forensics : HD dump vs. Rescue iso image

- They contain exactly the same crypto information (salt+keys : only password is missing).
- We can very well brute force from a Rescue cdrom image (easier to clone/steal than a whole HD).
- This is not intuitive : social engineering risk increased.

#### Demo Reversing the Truecrypt Rescue disk

#### Valeu pela presenca ;)

## **Questions ?**